




## Single-stage cartridge vacuum generators mod. ECM 70S ÷ 150S

Single-stage vacuum generators, which use interchangeable-cartridge generators with capacities ranging from 70 to 150 NI/min. These cartridges can also be used in a parallel configuration, and after appropriate drilling may be used on the application structure due to their simple construction.

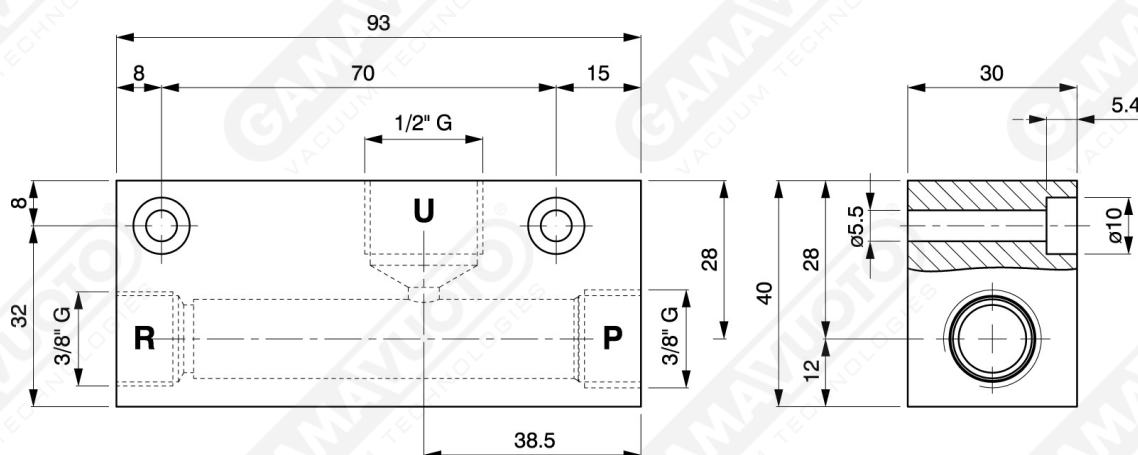

**Art. ECM 70S ÷ 150S**

Model	Working pressure															Maximum vacuum level in kPa
	3 BAR			4 BAR			5 BAR			6 BAR			7 BAR			
	vacuum level in kPa	vacuum fl ow NI/min	air consumption NI/min	vacuum level in kPa	vacuum flow NI/min	air consumption NI/min	vacuum level in kPa	vacuum flow NI/min	air consumption NI/min	vacuum level in kPa	vacuum flow NI/min	air consumption NI/min	vacuum level in kPa	vacuum flow NI/min	air consumption NI/min	
ECM 70S	38	62	52	52	65	63	65	68	79	81	69	92	89	68	104	94.1
ECM 90S	52	75	99	70	82	128	86	92	158	92	88	179	91	83	219	91.9
ECM 150S	33	117	98	5	125	129	60	142	158	70	145	183	84	142	208	91.2