


**Single-stage cartridge vacuum generators mod. ECM 200S - 240S**



Single-stage vacuum generators, which use interchangeable-cartridge ejectors with capacities ranging from 180 to 240 NI/min. These cartridges can also be used in a parallel configuration, and after appropriate drilling may be used on the application structure due to their simple construction.

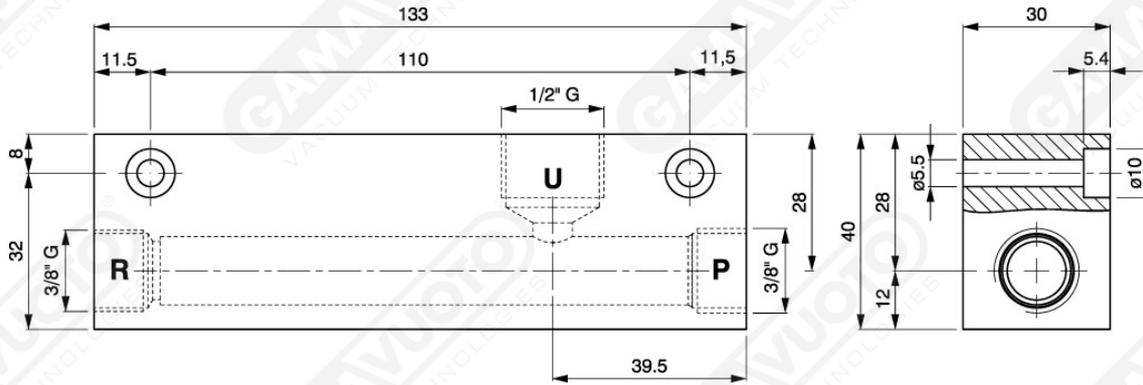

**Art. ECM 200S - 240S**

**Working pressure**

Model	3 BAR			4 BAR			5 BAR			6 BAR			7 BAR			Maximum vacuum level in kPa
	vacuum level in kPa	vacuum flow NI/min	air consumption NI/min	vacuum level in kPa	vacuum flow NI/min	air consumption NI/min	vacuum level in kPa	vacuum flow NI/min	air consumption NI/min	vacuum level in kPa	vacuum flow NI/min	air consumption NI/min	vacuum level in kPa	vacuum flow NI/min	air consumption NI/min	
ECM200S	45	196	233	73	213	295	93	217	342	92	208	395	91	200	433	93.1
ECM240S	44	217	225	66	238	283	83	235	334	87	229	393	85	225	467	88.0