


Single-stage in-line vacuum generators mod. ETM



Single-stage in-line vacuum generators, which use aluminium/brass ejectors.  
The vacuum generator has two opposite threaded connections: one for the compressed air supply and one for aspiration thus allowing use in line and a closepositioning use.

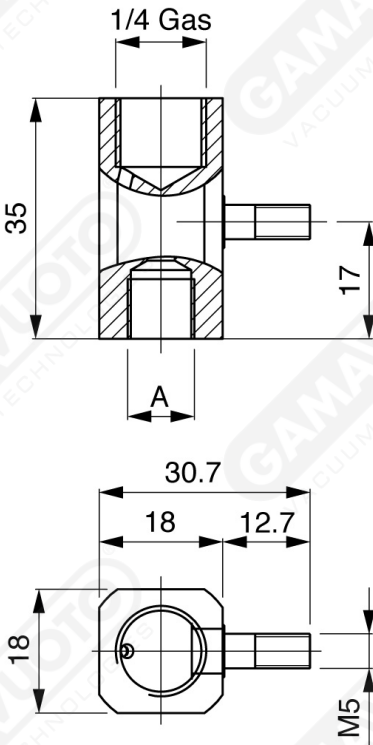

Art. ETM

Code															A	
ETM 01															1/4"	
ETM 02															1/8"	
Working pressure																
2 BAR			3 BAR			4 BAR			5 BAR			6 BAR			Maximum vacuum level in kPa	Maximum vacuum flow in NI/min
vacuum level in kPa	vacuum flow NI/min	air consumption NI/min	vacuum level in kPa	vacuum flow nl/min	air consumption NI/min	vacuum level in kPa	vacuum flow nl/min	air consumption NI/min	vacuum level in kPa	vacuum flow nl/min	air consumption NI/min	vacuum level in kPa	vacuum flow nl/min	air consumption NI/min		
23.60	11.60	16.60	45.00	16.60	22.40	63.70	18.30	28.30	81.30	19.10	33.10	87.70	20.00	39.00	88.00	20.00