





The new “VMMST - VMLST” series generators are made of plastic material composed of 1 to 4 practical and light modules. Each module consists of 1 or 2 rows of cartridges and can be assembled quickly and easily, with capacities ranging from 194 e 2402 l/min while maintaining the maximum achievable vacuum value unchanged. In this version is available a one-way valve that allows the maintenance of the vacuum even in the event of a sudden power failure. Available with two types of cartridges: - High Vacuum (95%) mod. VMMST - Low Consumption mod. VMLST.

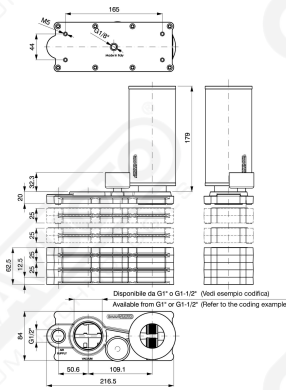

Art. VMMST 1 ÷ 8

Mod.	Bar	Vacuum kPa	Vacuum flow NI/min	Consumption NI/min
VMMST1	2	41	217	70
	3	77	263	94
	4	95	311	115
	5	94	307	136
	6	93	322	158
	7	91	338	178
	8	90	357	199
	VMMST2	2	41	391
3		77	473	189
4		95	559	231
5		94	553	273
6		93	579	316
7		91	609	356
8		90	642	397
VMMST3		2	41	513
	3	77	620	257
	4	95	734	315
	5	94	725	372
	6	93	760	430
	7	91	799	485
	8	90	842	542
	VMMST4	2	41	690
3		77	835	343
4		95	987	420
5		94	976	496
6		93	1022	574
7		91	1075	646
8		90	1133	722

Mod.	Bar	Vacuum kPa	Vacuum flow NI/min	Consumption NI/min
VMMST5	2	41	850	319
	3	77	1029	429
	4	95	1217	525
	5	94	1202	620
	6	93	1260	717
	7	91	1324	808
	8	90	1396	903
	2	41	1018	384
VMMST6	3	77	1232	516
	4	95	1457	631
	5	94	1440	746
	6	93	1509	863
	7	91	1586	973
	8	90	1672	1087
	2	41	1182	446
	3	77	1431	598
VMMST7	4	95	1693	732
	5	94	1673	865
	6	93	1753	1000
	7	91	1842	1127
	8	90	1942	1259
	2	41	1352	506
	3	77	1637	679
	4	95	1936	831
VMMST8	5	94	1913	982
	6	93	2005	1135
	7	91	2107	1279
	8	90	2222	1429

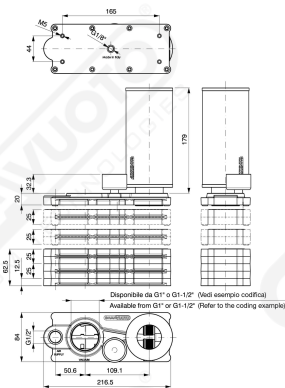

Art. VMLST 1 ÷ 8

Mod.	Bar	Vacuum kPa	Vacuum flow NI/min	Consumption NI/min
VMLST1	2	28	194	48
	3	44	244	62
	4	59	284	76
	5	70	308	90
	6	75	323	105
	7	77	335	117
	8	78	345	129

Mod.	Bar	Vacuum kPa	Vacuum flow NI/min	Consumption NI/min
VMLST2	2	28	370	102
	3	44	465	129
	4	59	541	160
	5	70	587	190
	6	75	616	219
	7	77	638	245
	8	78	658	270
VMLST3	2	28	506	152
	3	44	636	194
	4	59	740	240
	5	70	802	284
	6	75	842	329
	7	77	872	368
	8	78	899	405
VMLST4	2	28	680	203
	3	44	854	258
	4	59	994	319
	5	70	1077	379
	6	75	1131	438
	7	77	1171	491
	8	78	1207	540
VMLST5	2	28	851	252
	3	44	1069	320
	4	59	1244	396
	5	70	1349	470
	6	75	1416	543
	7	77	1466	608
	8	78	1512	668
VMLST6	2	28	1019	305
	3	44	1281	388
	4	59	1490	479
	5	70	1615	569
	6	75	1696	657
	7	77	1756	736
	8	78	1810	810
VMLST7	2	28	1185	356
	3	44	1489	452
	4	59	1732	559
	5	70	1877	663
	6	75	1971	767
	7	77	2041	859
	8	78	2104	944

Mod.	Bar	Vacuum kPa	Vacuum flow l/min	Consumption l/min
VMLST8	2	28	1352	406
	3	44	1699	517
	4	59	1977	639
	5	70	2143	758
	6	75	2250	876
	7	77	2329	982
	8	78	2402	1079